



TOCDDEM


HYDRAULIC HAMMERS

GETS THE JOB DONE!




Back British Business



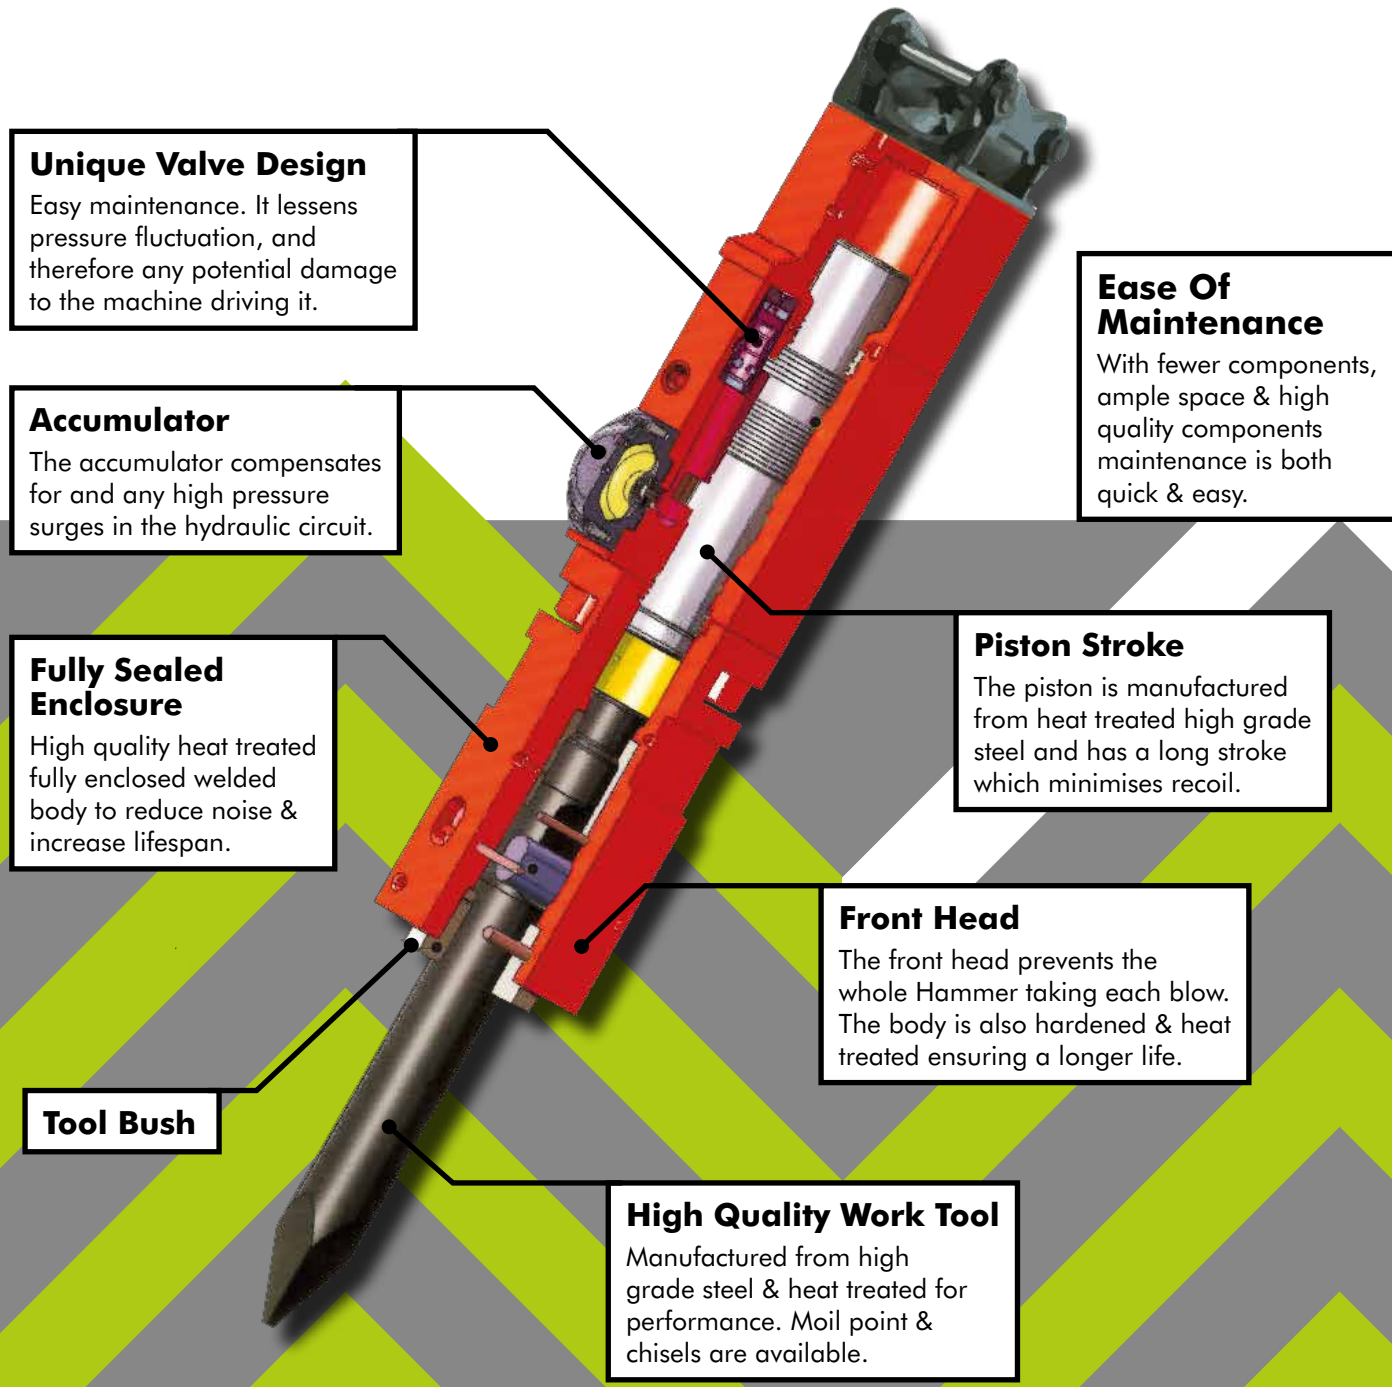

GETS THE JOB DONE!

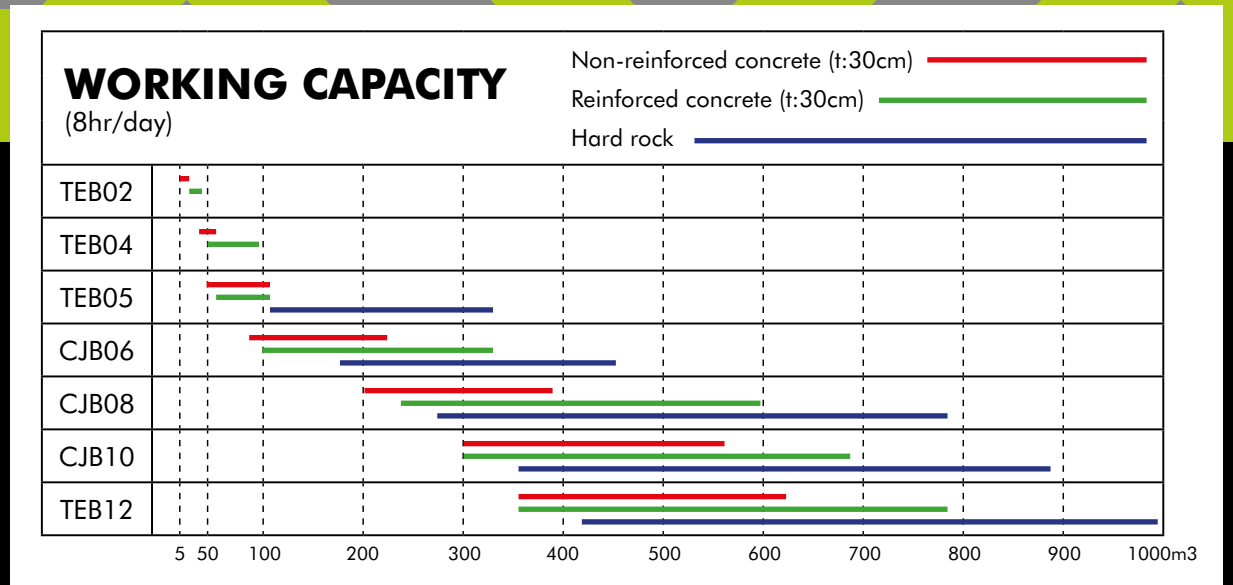

** Due to ongoing development specifications may change at any time

** Due to ongoing development specifications may change at any time

All CJ JH Plant & Tools TocDem Hydraulic Hammers are designed using the latest technology, advances in engineering & to the very highest specification. These units are able to easily cope with the demands of any Demolition, Mining, Construction or Utility site.



Every TocDem Hammer is supplied with:

- 2 Points / Chisels
- Head Bracket
- 2 Head Bracket Pins
- 2 Hydraulic Hoses & Couplings
- Tool Box
- Gas Bottle
- Instruction Manual
- Parts Manual
- CE Certificate Of Conformity

Excellent BPM Impact Rate – Increasing efficiency

TocDem Hammers give a severe and deep impact, coupled with a fast and efficient BPM “Blows Per Minute”. When put up against the competition the TocDem Hammer outperforms by virtue of its unique design & therefore saves you time and money.

Energy Class

TocDem Hammers range from 121ft lb / 165 Joules through to a powerful and substantial 8850 ft lb / 12000 Joules.

Quality Control, Research & Development

As a service business as well as a manufacturer CJ JH Plant & Tools appreciate the need for quality control. A number of rigorous pre delivery inspections and test are carried out before any Hammer is supplied. As well as this CJ JH Plant & Tools are always evaluation current technology & latest techniques in an effort to constantly improve the product range.

Technical, Customer & After Sales Support


A key feature of CJ JH Plant & Tools is always “standing behind” and supporting any product we sell. With this in mind we always stock a full range of all spares for TocDem Hammers available for immediate delivery and are always available to give technical advice & support on the range.

Hydraulic Breaker

Model Number		TEB 00	TEB 01	TEB 02	TEB 04	TEB 05	TEB 06	TEB 08	TEB 10	TEB 12
Suitable Excavator	tonne	0.8-1.6	1.2-3.0	2.0-4.0	4.0-7.0	8.0-10.0	11.0-18.0	19-26	28-40	40-55
Suitable Excavator	lbs	1760 - 3520 lbs	2600 - 6600 lbs	4400 - 8800 lbs	8800 - 15400 lbs	17,600 - 22000 lbs	24200 - 39600 lbs	41800 - 57200 lbs	61600 - 88000 lbs	88000 - 121000 lbs
Chisel Diameter	mm	40	45	53	75	85	100	140	155	175
Total Weight	kg	90	125	180	421	577	973	1989	2950	4210
Total Weight lbs	lbs	198	275	396	926.2	1269.4	2140.6	4375.8	6490	9262
Overall Length	mm	983	1100	1100	1528	1920	2260	2810	3152	3400
Operating Pressure	kg/cm2	90-120	90-120	90-120	110-160	120-170	150-170	160-180	160-180	160-180
Oil Flow	l/min	15-25	15-25	15-25	30-45	45-85	80-120	130-170	170-220	210-290
Impact Rate	BPM	800-1400	700-1200	700-1200	500-800	400-700	400-700	400-600	250-400	200-350
Energy Class	ft lb	150	250	650	1000	1500	4000	6000	8000	10000
Hose Diameter	inch	1/2"	1/2"	1/2"	1/2"	3/4"	3/4"	1"	1"	1.25"

** Due to ongoing development specifications may change at any time

** Due to ongoing development specifications may change at any time

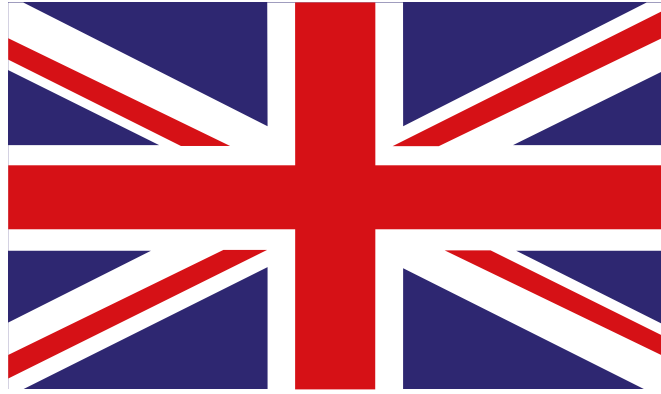

Back British Business

CE

